


سیم بندی و شینه کشی


Model	Cabling cross section (Cu)				Screw size	Tightening torque(N.m)
	Number of piece	Flexible cable with cold pressed - socket(mm ²)	Flexible cable without cold pressed - socket(mm ²)	Inflexible cable(mm ²)		
NS07-009	1~2	2.5	4	4	M3.5	0.8
NS07-012	1~2	2.5	4	4	M3.5	0.8
NS07-018	1~2	4	6	6	M3.5	0.8
NS07-025	1	4	10	6	M4	1.2
	2	4	6	6	M4	1.2
NS07-032	1	4	10	6	M4	1.2
	2	4	6	6	M4	1.2
NS07-040	1	10	16	10	M4	3.5
	2	10	10	10	M8	3.5
NS07-050	1	16	25	25	M8	3.5
	2	16	16	-	M8	3.5
NS07-065	1	16	25	25	M8	3.5
	2	16	16	-	M8	3.5
NS07-080	1	50	50	50	M8	3.5
	2	25	35	-	M10	4.0
NS07-095	1	50	50	50	M10	4.0
	2	25	35	-	M10	4.0

Model	Cabling cross section (Cu)			Screw size	Tightening torque (N.m)
	Number of piece	Cable Cross section (mm ²)	Cubusbar Crosssection (mm ²)		
NS07-115	1	70~90	-	M6	3
NS07-150	1	70~90	-	M8	6
NS07-185	1	95~150	-	M8	6
NS07-225	1	95~150	-	M10	10
NS07-330	1	185~240	-	M10	10
NS07-400	1	240	30x5	M10	10
	2	150	-	-	-
NS07-500	2	150~185	40x5	M10	10
NS07-630	2	185~240	50x5	M12	14
NS07-780	2	185~240	50x5	M12	14

ابعاد

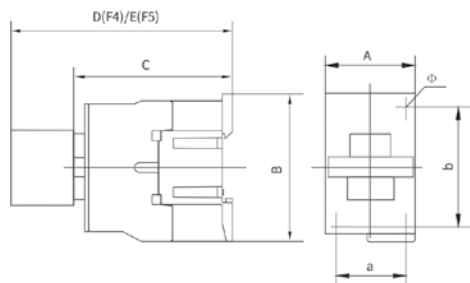


مدل های NS07-009 تا NS07-032

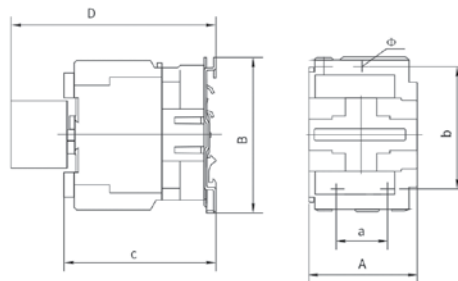


مدل های NS07-040 تا NS07-095

Model	A (max)	B (max)	C (max)	D (max)	a	b	Φ
NS07-009 - NS07-012	47	76	86	124.5	34/35	50/60	4.5
NS07-018	47	76	91	129.5	34/35	50/60	4.5
NS07-025	58	86	98	136.5	40	50/60	4.5
NS07-032	58	86	102	140.5	40	50/60	4.5
NS07-040 - NS07-065	77	129	116	154.5	40	100/110	6.5
NS07-080 - NS07-095	87	129	127	165.5	40	100/110	6.5
NS07-115	163.5	162	171	-	74	120	-
NS07-150	163.5	170	171	-	82	120	-
NS07-185	168.5	174	181	-	82	124	-
NS07-225	168.5	197	181	-	96	124	-
NS07-265	201.5	203	213	-	96	145	-
NS07-330	213	206	219	-	97	156	-
NS07-400	213	206	219	-	97	156	-
NS07-500	233	238	232	-	-	-	-
NS07-630	309	304	255	-	160	200	-
NS07-780	309	304	255	-	-	-	-

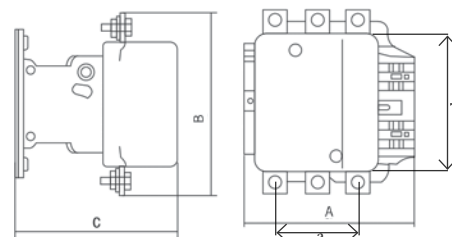

مدل های NS07-115 تا NS07-500

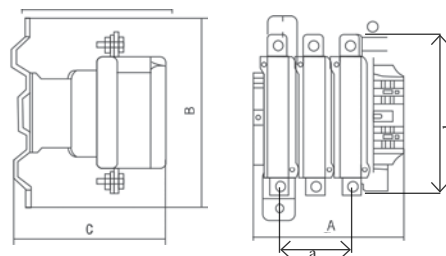

مدل های NS07-630 تا NS07-780