


1 جنس قاب از پلی کربنات


2 جنس بدنه از پلی آمید 66

3 جنس پیچ از استیل با روکش فلز روی

4 جنس شینه از فلز برنج

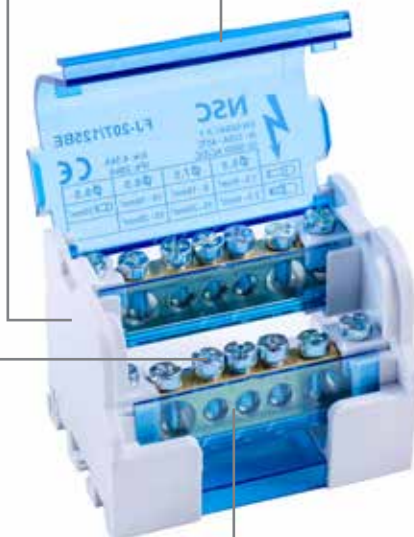

5 صرفه جویی فوق العاده در زمان و فضای کاری

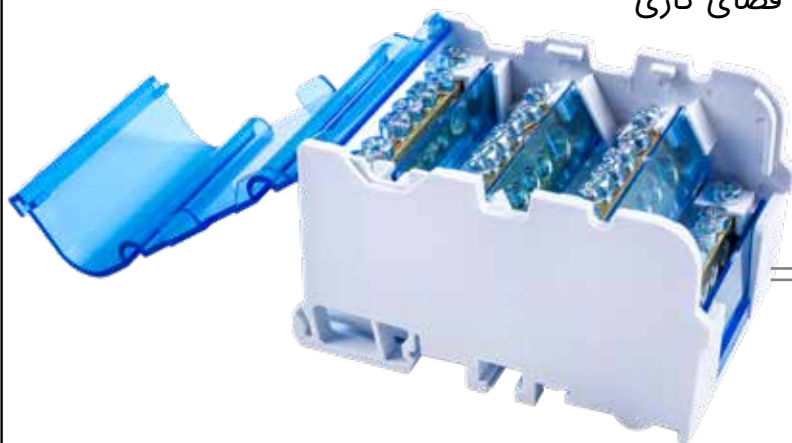

6 افزایش نظم و زیبایی محیط تابلو

NSC




NS22-FJ125A-1P

NS22-FJ250A-1P

NS22-FJ250AL

توان بلا

CERTIFICATION	CB/CE/RoHS	CB/CE/RoHS	CB/CE/RoHS
MATERIAL			
Size(mm)	74x20.2x42.3	99.1x31.5x49.4	205.7x52.3x50
Screw	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel
Conductor	Tin-Coated Brass	Tin-Coated Brass	Tin-Coated Brass
Housing	PA66/V-0	PA66/V-0	PA66/V-0
Cover	PC	PC	PC
ELECTRICAL DATA			
Standards	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
Voltage(V)	1000	1000	690
Current(A)	125	250	250
Icw(KA)	4.2	14.4	14.4
IPk(KA)	25	42	42
WIRING DATA			
Input	A	A	A
Connection Points	x1	x1	x1
Torque(N·m)	8.5	19	/
Diameter(mm)	10.1	15.1	/
Metric Wire(mm ²)	10~35	35~120	10~120
Imperial Wire(AWG)	8~1/0	6~250kcmil	8~250kcmil
Output	A	A	A
Connection Points	x1	x1	x1
Torque(N·m)	8.5	19	/
Diameter(mm)	10.1	15.1	/
Metric Wire(mm ²)	10~35	35~120	10~120
Imperial Wire(AWG)	8~1/0	6~250kcm	8~250kcm
PACKING			
Pcs/Inner Box	6	4	2
Pcs/Master Carton	192	72	34

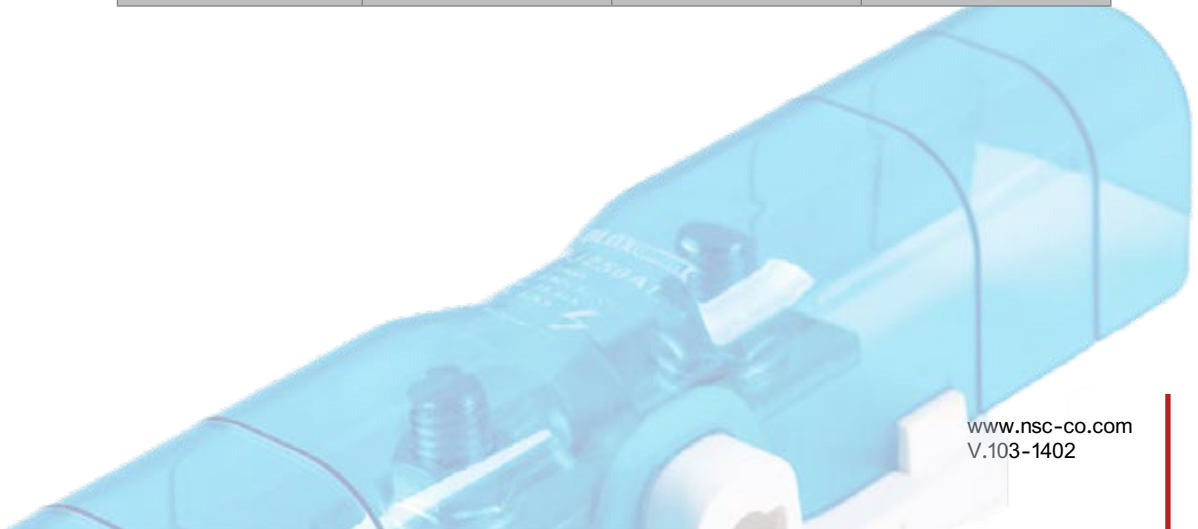



NS22-FJ80A

NS22-FJ125A

NS22-FJ160A

NS22-FJ175A

CERTIFICATION	CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS
MATERIAL							
Size(mm)	66x27x46		77x29x46		77x29x46		71x46.5x45
Screw	Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel
Conductor	Tin-Coated Brass		Tin-Coated Brass		Tin-Coated Brass		Brass
Housing	PA66/V-0		PA66/V-0		PA66/V-0		PA66/V-0
Cover	PC		PC		PC		PC
ELECTRICAL DATA							
Standards	IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1
Voltage(V)	1000		1000		1000		690
Current(A)	80		125		160		175
Icw(KA)	3		4.2		11.8		11
IPk(KA)	22		30		30		30
WIRING DATA							
Input	A		A		A		A
Connection Points	x1		x1		x1		x1
Torque(N·m)	3.5		8.5		8.5		5
Diameter(mm)	6.8		10		12.3		12
Metric Wire(mm ²)	6~16		10~35		10~70		16~70
Imperial Wire(AWG)	16~4		8~1/0		8~3/0		5~2/0
Output	A	B	A	Jumper	A	Jumper	A
Connection Points	x4	x2	x6	x1	x6	x1	x10
Torque(N·m)	1.2	3.5	3.5	3.5	3.5	3.5	3
Diameter(mm)	4.5	6.8	6.8	6.8	6.8	6.8	6
Metric Wire(mm ²)	2.5~6	2.5~16	2.5~16	6~16	2.5~16	6~16	2.5~16
Imperial Wire(AWG)	16~8	16~4	14~4	14~4	14~4	14~4	13~5
PACKING							
Pcs/Inner Box	5		5		5		2
Pcs/Master Carton	250		160		160		96
ACCESSORIES							
Jumper			NS22-FJS-A		NS22-FJS-A		

تک پل



NS-22

www.nsc-co.com
V.103-1402



NS22-FJ250A

NS22-FJ400A

NS22-FJ500A

تيرمينال

CERTIFICATION	CB/CE/RoHS			CB/CE/RoHS			CB/CE/RoHS		
MATERIAL									
Size(mm)	96x46x50			96x46x50			96x46x50		
Screw	Zinc-Coated Steel			Zinc-Coated Steel			Zinc-Coated Steel		
Conductor	Tin-Coated Brass			Tin-Coated Brass			Tin-Coated Brass		
Housing	PA66/V-0			PA66/V-0			PA66/V-0		
Cover	PC			PC			PC		
ELECTRICAL DATA									
Standards	IEC 60947-7-1			IEC 60947-7-1			IEC 60947-7-1		
Voltage(V)	1000			1000			1000		
Current(A)	250			400			500		
Icw(KA)	24.5			24.5			24.5		
IPk(KA)	51			51			51		
WIRING DATA									
Input	A			A			A		
Connection Points	x1			x1			x1		
Torque(N·m)	19			25			10		
Diameter(mm)	15			19			/		
Metric Wire(mm ²)	35~120			95~185			8x24		
Imperial Wire(AWG)	6~250kcmil			3/0~400kcmil			/		
Output	A	B	C	A	B	C	A	B	C
Connection Points	x2	x5	x4	x2	x5	x4	x2	x5	x4
Torque(N·m)	4.4	2.7	2.7	4.4	2.7	2.7	4.4	2.7	2.7
Diameter(mm)	9	6.8	6.1	9	6.8	6.1	9	6.8	6.1
Metric Wire(mm ²)	6~35	2.5~16	2.5~10	6~35	2.5~16	2.5~10	6~35	2.5~16	2.5~10
Imperial Wire(AWG)	14~1	14~4	14~6	14~1	14~4	14~6	8~1	8~4	8~6
PACKING									
Pcs/Inner Box	3			3			3		
Pcs/Master Carton	54			54			54		





NS22-FJ125A-3P NS22-FJ175A-3P

CERTIFICATION	CB/CE/RoHS			CB/CE/RoHS
MATERIAL				
Size(mm)	74x99x51			71x81.5x45
Screw	Zinc-Coated Steel			Zinc-Coated Steel
Conductor	Brass			Brass
Housing	PA66/V-0			PA66/V-0
Cover	PC			PC
ELECTRICAL DATA				
Standards	IEC 60947-7-1			IEC 60947-7-1
Voltage(V)	690			690
Current(A)	125			175
Icw(KA)	4.4			11
IPk(KA)	30			30
WIRING DATA				
Input	A	B	C	A
Connection Points	3x1	3x5	3x2	3x1
Torque(N·m)	1.5	0.8	1.5	5
Diameter(mm)	9	5	7	12
Metric Wire(mm ²)	6~35	1.5~6	4~16	16~70
Imperial Wire(AWG)	9~2	15~9	11~5	5~2/0
Output	A	B	C	A
Connection Points	x1	x4	x6	3x6
Torque(N·m)	1.5	0.8	1.5	3
Diameter(mm)	9	5	7	6
Metric Wire(mm ²)	6~35	1.5~6	4~16	2.5~16
Imperial Wire(AWG)	9~2	15~9	4~16	13~5
PACKING				
Pcs/Inner Box	1			2
Pcs/Master Carton	50			52

سه پل



NS-22

www.nsc-co.com
V.103-1402



NS22-FJ-211-100B NS22-FJ-215-100B NS22-FJ-207-125BE NS22-FJ-211-125BE

دوپل

CERTIFICATION	CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS	
MATERIAL								
Size(mm)	50x100x50		50x130x50		50x64x50		50x100x50	
Screw	Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel	
Conductor	Brass		Brass		Brass		Brass	
Housing	PA66/V-0		PA66/V-0		PA66/V-0		PA66/V-0	
Cover	PC		PC		PC		PC	
ELECTRICAL DATA								
Standards	IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1	
Voltage(V)	500		500		500		500	
Current(A)	100		100		125		125	
Icw(KA)	4.5		4.5		4.5		4.5	
IPk(KA)	20		20		20		20	
WIRING DATA								
Input	A		A		A		A	
Connection Points	x2		x2		x1		x2	
Torque(N·m)	2~3		2~3		2~3		2~3	
Diameter(mm)	8.5		8.5		8.5		8.5	
Metric Wire(mm ²)	10~25		10~25		10~35		10~35	
Imperial Wire(AWG)	10~25		10~25		10~16		10~16	
Output	A	B	A	B	A	B	A	B
Connection Points	x4	x5	x6	x7	x1	x5	x2	x7
Torque(N·m)	1.2~1.5	2~3	1.2~1.5	2~3	2~3	2~3	2~3	2~3
Diameter(mm)	4.5	5.5	4.5	5.5	7.5	5.3	7.5	5.3
Metric Wire(mm ²)	1.5~4	2.5~6	1.5~4	2.5~6	10~25	2.5~6	10~25	2.5~6
Imperial Wire(AWG)	0.75~4	1.5~6	0.75~4	1.5~6	6~16	1.5~6	6~16	1.5~6
PACKING								
Pcs/Inner Box	1		1		1		1	
Pcs/Master Carton	84		72		138		84	





NS22-FJ-217-40B NS22-FJ-208-80B NS22-FJ-218-80B NS22-FJ-207-100B

دو پل

CERTIFICATION	CB/CE/RoHS	CB/CE/RoHS	CB/CE/RoHS	CB/CE/RoHS
MATERIAL				
Size(mm)	50x130x50	50x64x50	50x130x50	50x64x50
Screw	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel
Conductor	Brass	Brass	Brass	Brass
Housing	PA66/V-0	PA66/V-0	PA66/V-0	PA66/V-0
Cover	PC	PC	PC	PC
ELECTRICAL DATA				
Standards	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
Voltage(V)	500	500	500	500
Current(A)	40	80	80	100
Icw(KA)	4.5	4.5	4.5	4.5
IPk(KA)	22	20	20	20
WIRING DATA				
Input	A	A	A	A
Connection Points	x2	x3	x6	x1
Torque(N·m)	2~3	2	2	2~3
Diameter(mm)	6	5.5	5.5	8.5
Metric Wire(mm ²)	6~16	2.5~6	2.5~6	10~25
Imperial Wire(AWG)	4~10	1.5~6	1.5~6	10~25
Output	A	A	A	A B
Connection Points	x15	x5	x12	x3 x3
Torque(N·m)	1.2~1.5	1.2	1.2	1.2~1.5 2~3
Diameter(mm)	4.3	4	4	4.5 5.5
Metric Wire(mm ²)	1.5~4	1.5~4	1.5~4	1.5~4 2.5~6
Imperial Wire(AWG)	0.75~4	0.75~4	0.75~4	0.75~4 1.5~6
PACKING				
Pcs/Inner Box	1	1	1	1
Pcs/Master Carton	74	134	72	138






NS22-FJ-215-125BE NS22-FJ-207-125B NS22-FJ-215-125B

دو پل

CERTIFICATION	CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS	
MATERIAL						
Size(mm)	50x130x50		50x94x50		50x162x50	
Screw	Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel	
Conductor	Brass		Brass		Brass	
Housing	PA66/V-0		PA66/V-0		PA66/V-0	
Cover	PC		PC		PC	
ELECTRICAL DATA						
Standards	IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1	
Voltage(V)	500		690		690	
Current(A)	125		125		125	
Icw(KA)	4.5		4.5		4.5	
IPk(KA)	20		18		18	
WIRING DATA						
Input	A		A		A	
Connection Points	x2		x1		x1	
Torque(N·m)	2~3		6~7		6~7	
Diameter(mm)	8.5		9.5		9.5	
Metric Wire(mm ²)	10~35		10~35		10~35	
Imperial Wire(AWG)	10~16		10~35		10~35	
Output	A	B	A	B	A	B
Connection Points	x2	x11	x5	x1	x11	x3
Torque(N·m)	2~3	2~3	2~3	2~3	2~3	2~3
Diameter(mm)	7.5	5.3	5.5	7.5	5.5	7.5
Metric Wire(mm ²)	10~25	2.5~6	2.5~6	10~25	2.5~6	10~25
Imperial Wire(AWG)	6~16	1.5~6	1.5~6	6~16	1.5~6	6~16
PACKING						
Pcs/Inner Box	1		1		1	
Pcs/Master Carton	72		40		53	

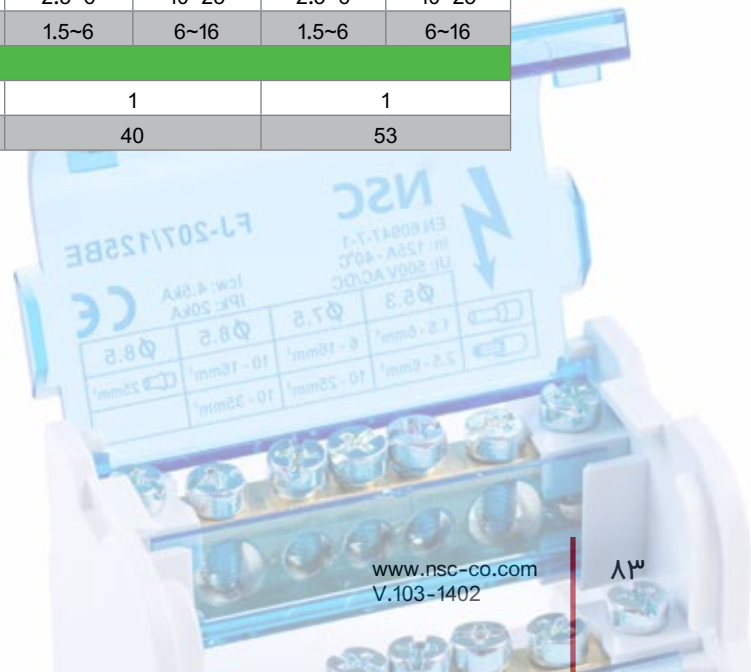




NS22-FJ-413-40B NS22-FJ-408-80B NS22-FJ-413-80B NS22-FJ-418-80B

چهار پیل

CERTIFICATION	CB/CE/RoHS	CB/CE/RoHS	CB/CE/RoHS	CB/CE/RoHS
MATERIAL				
Size(mm)	90x100x50	90x64x50	90x130x50	90x130x50
Screw	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel
Conductor	Brass	Brass	Brass	Brass
Housing	PA66/V-0	PA66/V-0	PA66/V-0	PA66/V-0
Cover	PC	PC	PC	PC
ELECTRICAL DATA				
Standards	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
Voltage(V)	500	500	500	500
Current(A)	40	80	80	80
Icw(KA)	4.5	4.5	4.5	4.5
IPk(KA)	22	20	20	20
WIRING DATA				
Input	A	A	A	A
Connection Points	x2	x3	x5	x6
Torque(N·m)	2~3	2	2	2
Diameter(mm)	6	5.5	5.5	5.5
Metric Wire(mm ²)	6~16	2.5~6	2.5~6	2.5~6
Imperial Wire(AWG)	4~10	1.5~6	1.5~6	1.5~6
Output	A	A	A	A
Connection Points	x11	x5	x8	x12
Torque(N·m)	1.2~1.5	1.2	1.2	1.2
Diameter(mm)	4.3	4	4	4
Metric Wire(mm ²)	1.5~4	1.5~4	1.5~4	1.5~4
Imperial Wire(AWG)	0.75~4	0.75~4	0.75~4	0.75~4
PACKING				
Pcs/Inner Box	1	1	1	1
Pcs/Master Carton	50	74	50	40

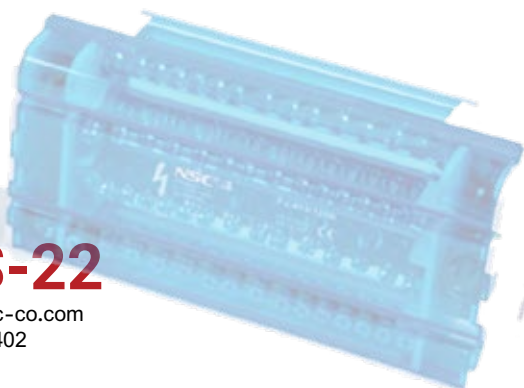

NS-22


www.nsc-co.com
V.103-1402



NS22-FJ-411-125BE NS22-FJ-415-125BE NS22-FJ-407-125B NS22-FJ-411-125B

چهار پل

CERTIFICATION	CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS	
MATERIAL								
Size(mm)	90x100x50		90x130x50		90x109x50		90x147x50	
Screw	Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel	
Conductor	Brass		Brass		Brass		Brass	
Housing	PA66/V-0		PA66/V-0		PA66/V-0		PA66/V-0	
Cover	PC		PC		PC		PC	
ELECTRICAL DATA								
Standards	IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1	
Voltage(V)	500		500		690		690	
Current(A)	125		125		125		125	
Icw(KA)	4.5		4.5		4.5		4.5	
IPk(KA)	20		20		20		20	
WIRING DATA								
Input	A		A		A		A	
Connection Points	x2		x2		x1		x1	
Torque(N·m)	2~3		2~3		6~7		6~7	
Diameter(mm)	8.5		8.5		9.5		9.5	
Metric Wire(mm ²)	10~35		10~35		10~35		10~35	
Imperial Wire(AWG)	10~16		10~16		10~35		10~35	
Output	A	B	A	B	A	B	A	B
Connection Points	x2	x7	x2	x11	x5	x1	x7	x3
Torque(N·m)	2~3	2~3	2~3	2~3	2~3	2~3	2~3	2~3
Diameter(mm)	7.5	5.3	7.5	5.3	5.5	7.5	5.5	7.5
Metric Wire(mm ²)	10~25	2.5~6	10~25	2.5~6	2.5~6	10~25	2.5~6	10~25
Imperial Wire(AWG)	6~16	1.5~6	6~16	1.5~6	1.5~6	6~16	1.5~6	6~16
PACKING								
Pcs/Inner Box	1		1		1		1	
Pcs/Master Carton	50		40		44		30	
ACCESSORIES								
Neutral Bar							NS22-NB125A	

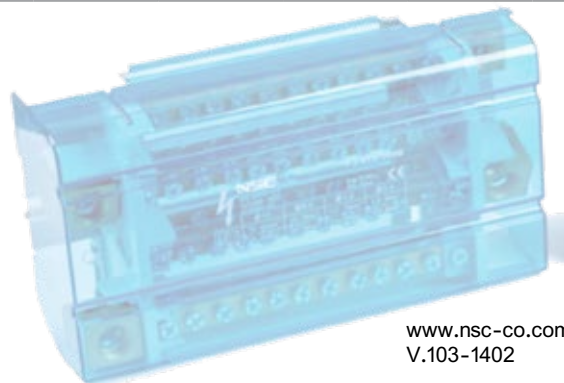



NS22-FJ-407-100B NS22-FJ-411-100B NS22-FJ-415-100B NS22-FJ-407-125BE

CERTIFICATION	CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS		CB/CE/RoHS	
MATERIAL								
Size(mm)	90x64x50		90x100x50		90x130x50		90x64x50	
Screw	Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel		Zinc-Coated Steel	
Conductor	Brass		Brass		Brass		Brass	
Housing	PA66/V-0		PA66/V-0		PA66/V-0		PA66/V-0	
Cover	PC		PC		PC		PC	
ELECTRICAL DATA								
Standards	IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1	
Voltage(V)	500		500		500		500	
Current(A)	100		100		100		125	
Icw(KA)	4.5		4.5		4.5		4.5	
IPk(KA)	20		20		20		20	
WIRING DATA								
Input	A		A		A		A	
Connection Points	x1		x2		x2		x1	
Torque(N·m)	2~3		2~3		2~3		2~3	
Diameter(mm)	8.5		8.5		8.5		8.5	
Metric Wire(mm ²)	10~25		10~25		10~25		10~35	
Imperial Wire(AWG)	10~25		10~25		10~25		10~16	
Output	A	B	A	B	A	B	A	B
Connection Points	x3	x3	x4	x5	x6	x7	x1	x5
Torque(N·m)	1.2~1.5	2~3	1.2~1.5	2~3	1.2~1.5	2~3	2~3	2~3
Diameter(mm)	4.5	5.5	4.5	5.5	4.5	5.5	7.5	5.3
Metric Wire(mm ²)	1.5~4	2.5~6	1.5~4	2.5~6	1.5~4	2.5~6	10~25	2.5~6
Imperial Wire(AWG)	0.75~4	1.5~6	0.75~4	1.5~6	0.75~4	1.5~6	6~16	1.5~6
PACKING								
Pcs/Inner Box	1		1		1		1	
Pcs/Master Carton	74		50		40		74	

چهار پل



NS-22


www.nsc-co.com
V.103-1402



NS22-FJ-415-125B NS22-FJ-412-160B NS22-FJ-412-160BH

CERTIFICATION	CB/CE/RoHS			CB/CE/RoHS			CB/CE/RoHS	
MATERIAL								
Size(mm)	90x182x50			90x175x50			90x170x70	
Screw	Zinc-Coated Steel			Zinc-Coated Steel			Zinc-Coated Steel	
Conductor	Brass			Brass			Brass	
Housing	PA66/V-0			PA66/V-0			PA66/V-0	
Cover	PC			PC			PC	
ELECTRICAL DATA								
Standards	IEC 60947-7-1			IEC 60947-7-1			IEC 60947-7-1	
Voltage(V)	690			690			690	
Current(A)	125			160			160	
Icw(KA)	4.2			8.2			8.2	
IPk(KA)	14.5			35			35	
WIRING DATA								
Input	A			A			A	
Connection Points	x1			x1			x1	
Torque(N·m)	6~7			8~10			8~10	
Diameter(mm)	9.5			12			11.5	
Metric Wire(mm ²)	10~35			10~50			10~50	
Imperial Wire(AWG)	10~35			10~50			10~50	
Output	A	B	C	A	B	C	A	B
Connection Points	x11	x1	x2	x3	x7	x1	x3	x8
Torque(N·m)	2~3	2~3	2~3	2~3	2~3	2~3	2~3	2~3
Diameter(mm)	5.5	7.5	8.5	8.5	7.2	5.5	8.5	7
Metric Wire(mm ²)	2.5~6	10~25	10~35	10~35	2.5~16	2.5~6	10~35	2.5~16
Imperial Wire(AWG)	1.5~6	6~16	10~25	10~25	1.5~16	1.5~6	10~25	1.5~16
PACKING								
Pcs/Inner Box	1			1			1	
Pcs/Master Carton	24			23			23	
ACCESSORIES								
Neutral Bar	NS22-NB125A			NS22-NB160A			NS22-NB160A	

چهار پل

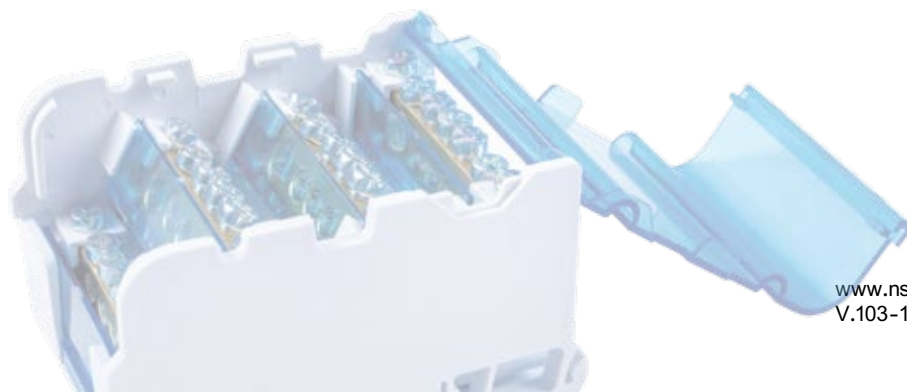




NS22-NB125A

NS22-NB160A

NS22-FJS-A

تجهيزات جانبی

CERTIFICATION	CE/RoHS	CE/RoHS	CE/RoHS
MATERIAL			
Length(mm)	142	168	-
Screw	Zinc-Coated Steel	Zinc-Coated Steel	-
Conductor	Brass	Brass	Tin-Coated Copper
Housing	PC	PC	PVC
ELECTRICAL DATA			
Standards	IEC 60947-7-1	IEC 60947-7-1	-
Voltage(V)	-	-	-
Current(A)	125	160	-
Icw(KA)	4.5	6.2	-
IPk(KA)	30	35	-
WIRING DATA			
Input	A	A	-
Connection Points	x3	x4	-
Torque(N·m)	2~3	2~3	-
Diameter(mm)	7.5	8.5	-
Rigid Wire(mm ²)	10~25	10~35	-
Flexible Wire(mm ²)	6~16	10~25	-
Output	A	A	-
Connection Points	x9	x10	-
Torque(N·m)	2~3	2~3	-
Diameter(mm)	5.5	7.2	-
Rigid Wire(mm ²)	2.5~6	2.5~16	-
Flexible Wire(mm ²)	1.5~6	1.5~16	-
APPLICATION			
	FJ-411/125B,FJ-415/125B	FJ-412/160B,FJ-412/160BH	FJ125A, FJ160A
PACKING			
Pcs/Bag	5	5	50
Pcs/Master Carton	90	110	-

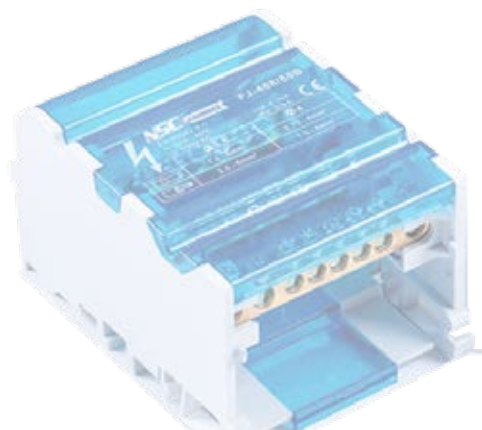

NS-22

www.nsc-co.com
V.103-1402