



NS21-FJ2.5N-D




NS21-FJ4N-D



NS21-FJ6N-D

CERTIFICATION	CQC/CE/RoHS	CQC/CE/RoHS	CQC/CE/RoHS
MATERIAL			
Size(mm)	5.2x42.5x47	6.2x42.5x47	8.2x42.5x47
Screw	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel
Pressure Frame	Nickel-Coated Brass	Nickel-Coated Brass	Nickel-Coated Brass
Conductor	Nickel-Coated Brass	Nickel-Coated Brass	Nickel-Coated Brass
Housing	PA66/V-0	PA66/V-0	PA66/V-0
ELECTRICAL DATA			
Standards	IEC 60947-7-2	IEC 60947-7-2	IEC 60947-7-2
Voltage(V)	-	-	-
Current(A)	-	-	-
WIRING DATA			
Strip Length(mm)	7	8	10
Flexible Wire(mm ²)	0.2~2.5	0.2~4	0.2~6
Rigid Wire(mm ²)	0.2~4	0.2~6	0.2~10
Imperial Wire(AWG)	24~12	24~10	26~8
Clamping Screw:			
Thread/Torque(N·m)	M3/0.6~0.8	M3/0.6~0.8	M4/1.5~1.8
Fixing Screw:			
Thread/Torque(N·m)	M2.5/0.5~0.6	M3/0.6~0.8	M4/1.5~1.8
PACKING			
Pcs/Inner Box	60	50	40
Pcs/Master Carton	2040	1700	1200

پیچی مخصوص ارت





NS21-FJ10N-D




NS21-FJ16N-D



NS21-FJ35NL-D

پیچی مخصوص ارت

CERTIFICATION	CQC/CE/RoHS	CQC/CE/RoHS	CQC/CE/RoHS
MATERIAL			
Size(mm)	10.2x42.5x47.3	12.2x42.5x54	15.2x55x51
Screw	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel
Pressure Frame	Nickel-Coated Brass	Nickel-Coated Brass	Nickel-Coated Brass
Conductor	Nickel-Coated Brass	Nickel-Coated Brass	Nickel-Coated Brass
Housing	PA66/V-0	PA66/V-0	PA66/V-0
ELECTRICAL DATA			
Standards	IEC 60947-7-2	IEC 60947-7-2	IEC 60947-7-2
Voltage(V)	-	-	-
Current(A)	76	101	125
WIRING DATA			
Strip Length(mm)	10	11	16
Flexible Wire(mm ²)	0.5~10	4~16	0.75~35
Rigid Wire(mm ²)	0.5~16	2.5~25	0.75~35
Imperial Wire(AWG)	24~6	22~4	18~2
Clamping Screw:			
Thread/Torque(N·m)	M4/1.5~1.8	M4/1.5~1.8	M6/3.2~3.7
Fixing Screw:			
Thread/Torque(N·m)	M4/1.5~1.8	M4/1.5~1.8	M5/2.5~3
PACKING			
Pcs/Inner Box	30	50	32
Pcs/Master Carton	1020	850	544

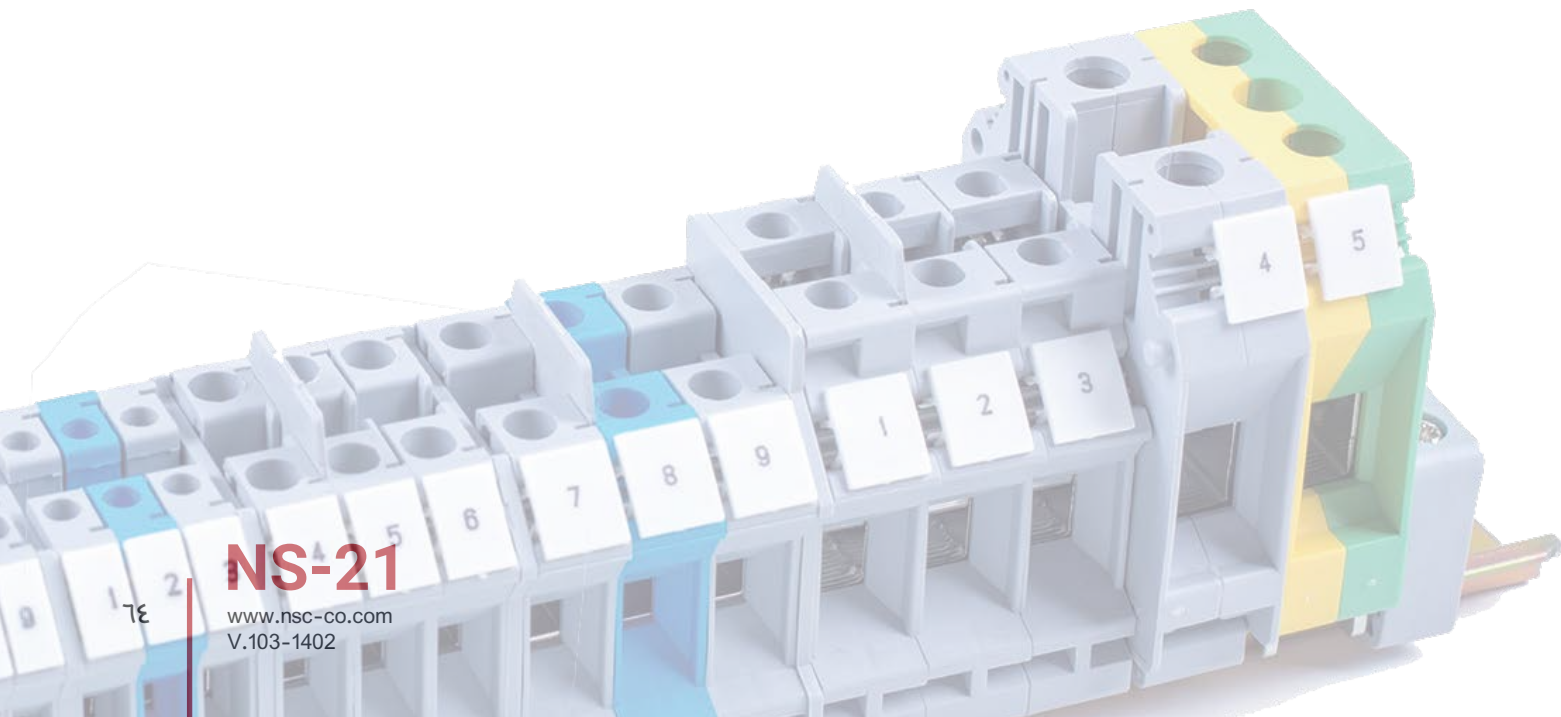

NS-21

www.nsc-co.com
V.103-1402



NS21-FJ50-D



NS21-FJ70-D



NS21-FJ95-D

CERTIFICATION	CQC/CE/RoHS	CQC/CE/RoHS	CQC/CE/RoHS
MATERIAL			
Size(mm)	20x70.5x76	20.3x70.5x80	25x83x90
Screw	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel
Pressure Frame	Nickel-Coated Brass	Nickel-Coated Brass	Nickel-Coated Brass
Conductor	Nickel-Coated Brass	Nickel-Coated Brass	Nickel-Coated Brass
Housing	PA66/V-0	PA66/V-0	PA66/V-0
ELECTRICAL DATA			
Standards	IEC 60947-7-2	IEC 60947-7-2	IEC 60947-7-2
Voltage(V)	-	-	-
Current(A)	150	192	230
WIRING DATA			
Strip Length(mm)	24	24	33
Flexible Wire(mm ²)	25~50	25~70	35~95
Rigid Wire(mm ²)	16~50	16~95	25~95
Imperial Wire(AWG)	6~0	4~00	4~000
Clamping Screw:			
Thread/Torque(N·m)	M6/6~8	M8/8~10	M8/15~20
Fixing Screw:			
Thread/Torque(N·m)	M6/6~8	M8/8~10	M8/15~20
PACKING			
Pcs/Inner Box	10	10	8
Pcs/Master Carton	200	150	96

پیشگی مخصوص ارت

