


NS21-FJ1-2.5 ورودی به خروجی 1 به 1
 NS21-FJ1-2.5-3 ورودی به خروجی 2 به 1
 NS21-FJ1-2.5-4 ورودی به خروجی 2 به 2

فشاری

CERTIFICATION	CQC/CE/RoHS		CQC/CE/RoHS		CQC/CE/RoHS	
MATERIAL						
Size(mm)	5x53x32		5x65x32		5x76x32	
Clamping Spring	Stainless Steel		Stainless Steel		Stainless Steel	
Conductor	Tin-Coated Copper		Tin-Coated Copper		Tin-Coated Copper	
Housing	PA66/V-0		PA66/V-0		PA66/V-0	
ELECTRICAL DATA						
Impulse Voltage(kV)	8		8		8	
Standards	IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1	
Voltage(V)	800		800		800	
Current(A)	24		24		20	
WIRING DATA						
Strip Length(mm)	8~9		8~9		8~9	
Metric Wire(mm ²)	0.08~2.5		0.08~2.5		0.08~2.5	
Imperial Wire(AWG)	28~12		28~12		28~12	
Connection Points	2		3		4	
PACKING						
Pcs/Inner Box	100		85		75	
Pcs/Master Carton	4000		3400		2550	
ACCESSORIES						
End Plate						
Model	P9/2.5		P9-2.5/3		P9-2.5/4	
Thickness	2.5mm		2.5mm		2.5mm	
Pcs/Bag	100		100		100	
Adjacent Jumper						
Model	T2.5		T2.5		T2.5	
Max Current	24A		24A		24A	
Pcs/Bag	100		100		100	
Alternate Jumper						
Model	H2.5		H2.5		H2.5	
Max Current	24A		24A		24A	
Pcs/Bag	100		100		100	
Central Marker						
ZB-S	Pcs/Bag	100	Pcs/Bag	100	Pcs/Bag	100

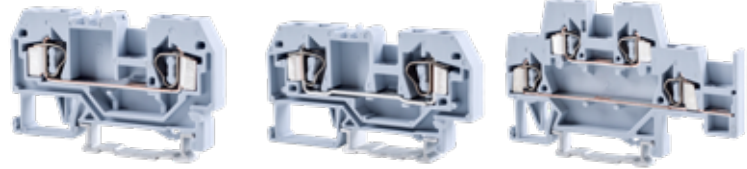

NS21-FJ1-4
ورودی به خروجی 1 به 1

NS21-FJ1-6
ورودی به خروجی 1 به 1

NS21-FJ1-2.5K
نوع 2 طبقه

فشاری

CERTIFICATION	CQC/CE/RoHS		CQC/CE/RoHS		CQC/CE/RoHS	
MATERIAL						
Size(mm)	6x59x33		8x73.5x39		5x75x43	
Clamping Spring	Stainless Steel		Stainless Steel		Stainless Steel	
Conductor	Tin-Coated Copper		Tin-Coated Copper		Tin-Coated Copper	
Housing	PA66/V-0		PA66/V-0		PA66/V-0	
ELECTRICAL DATA						
Impulse Voltage(kV)	8		8		6	
Standards	IEC 60947-7-1		IEC 60947-7-1		IEC 60947-7-1	
Voltage(V)	800		800		500	
Current(A)	32		41		20	
WIRING DATA						
Strip Length(mm)	9~10		12~13		8~9	
Metric Wire(mm ²)	0.08~4		0.2~6		0.08~2.5	
Imperial Wire(AWG)	28~12		24~10		28~14	
Connection Points	2		2		4(2x2)	
PACKING						
Pcs/Inner Box	75		45		60	
Pcs/Master Carton	3000		1800		2220	
ACCESSORIES						
End Plate						
Model	P9/4		P9/6		P9/2.5K	
Thickness	2.5mm		2.5mm		2.5mm	
Pcs/Bag	100		100		100	
Adjacent Jumper						
Model	T4		T6		T2.5	
Max Current	32A		41A		24A	
Pcs/Bag	100		100		100	
Alternate Jumper						
Model	H4		H6		H2.5	
Max Current	32A		41A		24A	
Pcs/Bag	100		100		100	
Central Marker						
ZB-S	Pcs/Bag	100	Pcs/Bag	100	Pcs/Bag	100





NS21-FJ1-2.5-D

ورودی به خروجی 1 به 1

NS21-FJ1-4-D


ورودی به خروجی 1 به 1

NS21-FJ1-6-D

ورودی به خروجی 1 به 1

فشاری مخصوص ارت

CERTIFICATION	CQC/CE/RoHS	CQC/CE/RoHS	CQC/CE/RoHS
MATERIAL			
Size(mm)	5x53x35	6x59x35	8x73.5x39
Clamping Spring	Stainless Steel	Stainless Steel	Stainless Steel
Conductor	Tin-Coated Copper	Tin-Coated Copper	Tin-Coated Copper
Housing	PA66/V-0	PA66/V-0	PA66/V-0
ELECTRICAL DATA			
Impulse Voltage(kV)	8	8	8
Standards	IEC 60947-7-2	IEC 60947-7-2	IEC 60947-7-2
Voltage(V)	-	-	-
Current(A)	-	-	-
WIRING DATA			
Strip Length(mm)	8~9	9~10	12~13
Metric Wire(mm ²)	0.08~2.5	0.08~4	0.2~6
Imperial Wire(AWG)	28~12	28~12	24~10
Connection Points	2	2	2
PACKING			
Pcs/Inner Box	100	75	45
Pcs/Master Carton	2100	1575	945

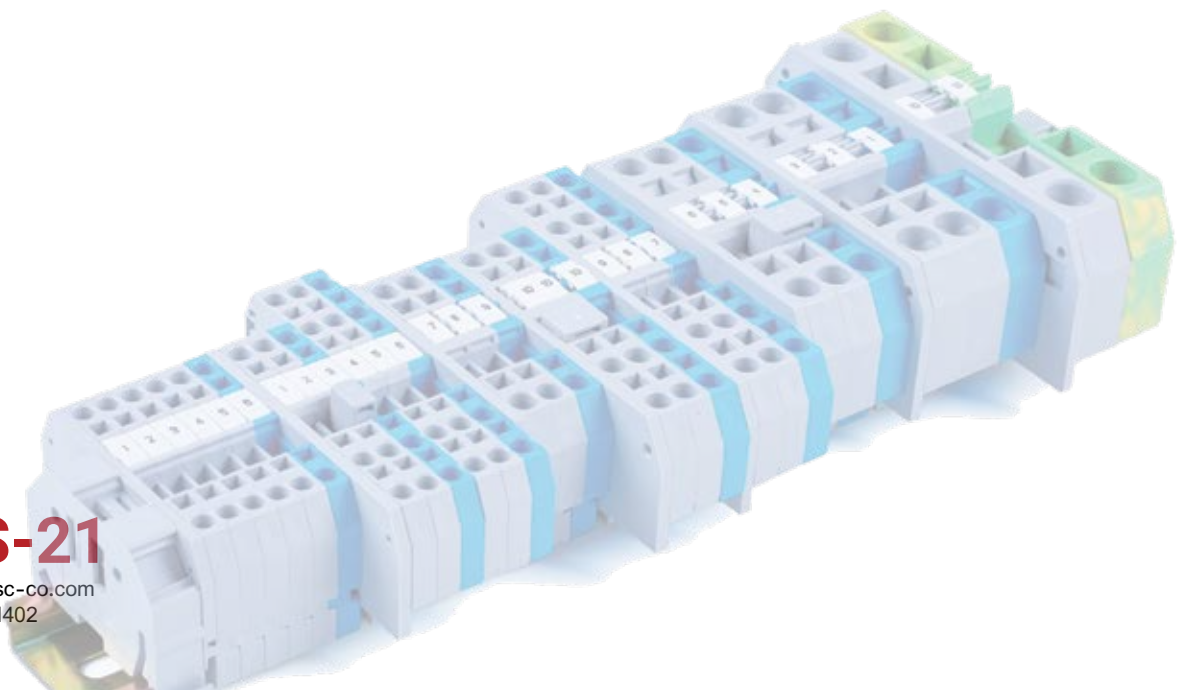

NS-21

www.nsc-co.com
V.103-1402