


- 1 مطابق با استاندارد IEC 60947-7-1 و گواهینامه های CE/RoHS
- 2 جنس بدنه و پایه از پلی آمید ۶۶
- 3 جنس پیچ استیل با روکش روی و جنس شینه برنج
- 4 تعداد خروجی متنوع از ۴ تا ۱۸ عدد
- 5 قابل استفاده در انواع سیم از سایز ۲/۵ تا ۱۶
- 6 قابلیت نصب روی ریل یا سطح
- 7 افزایش ایمنی، نظم، زیبایی در اتصالات زمین
- 8 تحت لیسانس BLOXconnect



ترمينال باس بار

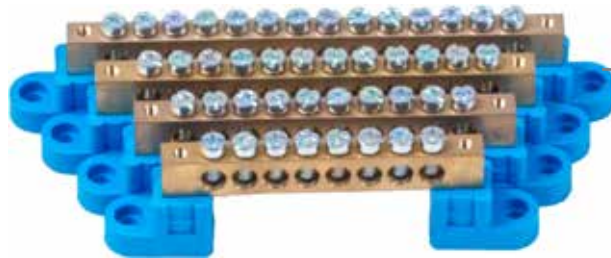

NS24-FKG4

NS24-FKG16

NS24-FKG35

CERTIFICATION	CE/RoHS	CE/RoHS	CE/RoHS
MATERIAL			
Length/Width(mm)	23.7x7	23.7x9.8	27x14.3
Screw	M4, Zinc-Coated Steel	M5, Zinc-Coated Steel	M6, Zinc-Coated Steel
Pressure Frame	Zinc-Coated Steel	Zinc-Coated Steel	Zinc-Coated Steel
Plastic Part	PA66/V-0	PA66/V-0	PA66/V-0
ELECTRICAL DATA			
Standards	IEC 60947-7-1	IEC 60947-7-1	IEC 60947-7-1
Voltage(V)	300	300	300
Current(A)	41	76	125
WIRING DATA			
Strip Length(mm)	16	16	16
Flexible/Rigid (mm ²)	0.5~4/ 0.5~6	1.5~16/ 1.5~16	2.5~35/ 2.5~35
Imperial Wire(AWG)	20~10	16~6	14~2
Torque(N·m)	1.5~1.8	2.5~3	3.2~3.7
PACKING			
Pcs/Inner Box	100	100	100



BUSBAR



AB-01





AB-02

CERTIFICATION	RoHS	CERTIFICATION	RoHS	CERTIFICATION	RoHS
NEUTRAL BUSBAR		SUPPORT		DOUBLE SUPPORT	
Size(mm)	1000x10x3	Screw	M5, Zinc-Coated Steel	Height(mm)	49
Material	Nickel-Coated Brass	Plastic Part	PA66/V-0	Material	PA66/V-0
PACKING		PACKING		PACKING	
Pcs/Bag	30	Pcs/Bag	100	Pcs/Bag	50

NS-24

www.nsc-co.com
V.103-1402

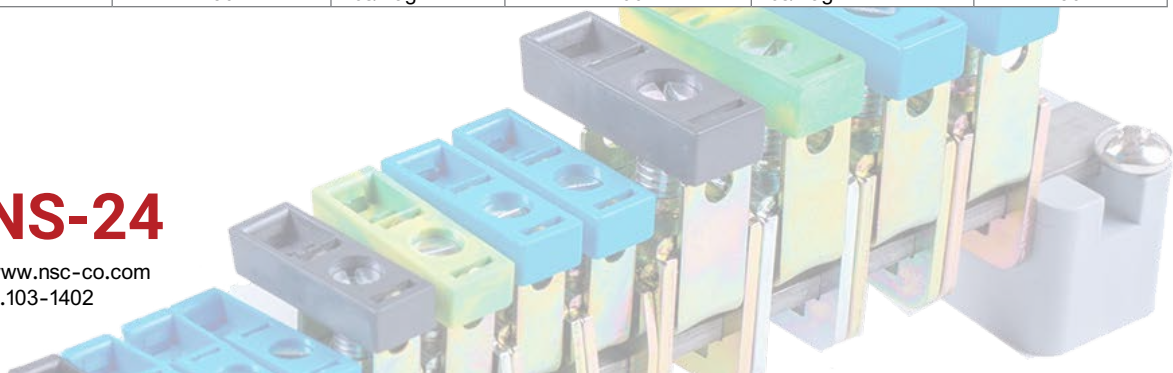

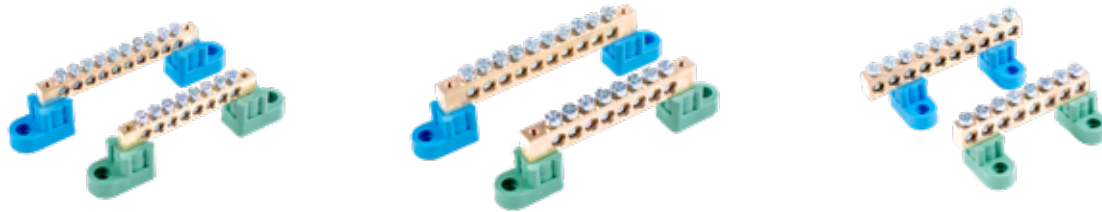

شینه نول بدون روکش پایه پیچی

NS24-FKG2-S
SERIES

NS24-FKG2-L
SERIES

NS24-FKG62-L
SERIES

CERTIFICATION	CE/RoHS	CERTIFICATION	CE/RoHS	CERTIFICATION	CE/RoHS						
MATERIAL											
Conductor	Brass	Conductor	Brass	Conductor	Brass						
Screw	M4, Zinc-Coated Steel	Screw	M5, Zinc-Coated Steel	Screw	M5, Zinc-Coated Steel						
Plastic Part	PA66/V-0	Plastic Part	PA66/V-0	Plastic Part	PA66/V-0						
ELECTRICAL DATA											
Voltage(V)	250~400c	Voltage(V)	250~400	Voltage(V)	250~400						
Metric Wire(mm ²)	2.5~6	Metric Wire(mm ²)	2.5~16	Metric Wire(mm ²)	2.5~16						
SIZE											
Height/Width(mm)	30x16	Height/Width(mm)	34x16	Height/Width(mm)	34x28						
Diameter(mm)	5	Diameter(mm)	6.5	Diameter(mm)	6.5						
Model	Holes	Length	Pcs/Bag	Model	Holes	Length	Pcs/Bag	Model	Holes	Length	Pcs/Bag
FKG2-06S	6	88.5	20	FKG2-06L	6	99.5	20	FKG62-08L	8	74	20
FKG2-07S	7	95	20	FKG2-07L	7	107.5	20	FKG62-10L	10	88	20
FKG2-08S	8	101.5	20	FKG2-08L	8	115.5	20	FKG62-12L	12	106	20
FKG2-10S	10	114.5	20	FKG2-10L	10	131.5	20	FKG62-14L	14	122	20
FKG2-12S	12	127.5	20	FKG2-12L	12	147.5	20	FKG62-16L	16	138	20
FKG2-14S	14	138.5	20	FKG2-14L	14	161	20				
FKG2-18S	18	162.5	20	FKG2-18L	18	192	20				

شینه های نول و ارت






شینه نول بدون روکش ریل خور

NS24-FKGS-H
SERIES

NS24-FKGL-H
SERIES

NS24-FKGS-J
SERIES

CERTIFICATION	CE/RoHS	CERTIFICATION	CE/RoHS	CERTIFICATION	CE/RoHS						
MATERIAL											
Conductor	Brass	Conductor	Brass	Conductor	Brass						
Screw	M4, Zinc-Coated Steel	Screw	M5, Zinc-Coated Steel	Screw	M4, Zinc-Coated Steel						
Plastic Part	PA66/V-0	Plastic Part	PA66/V-0	Plastic Part	PA66/V-0						
ELECTRICAL DATA											
Voltage(V)	250~400	Voltage(V)	250~400	Voltage(V)	250~400						
Metric Wire(mm ²)	2.5~6	Metric Wire(mm ²)	2.5~16	Metric Wire(mm ²)	2.5~6						
SIZE											
Height/Width(mm)	43x12	Height/Width(mm)	46x12	Height/Width(mm)	31x11.5						
Diameter(mm)	5.2	Diameter(mm)	6.5	Diameter(mm)	5.3						
Model	Holes	Length	Pcs/Box	Model	Holes	Length	Pcs/Box	Model	Holes	Length	Pcs/Box
FKG06S-H	6	85	20	FKG06L-H	6	85	20	FKG07S-J	7	51	20
FKG08S-H	8	85	20	FKG08L-H	8	85	20	FKG08S-J	8	59	20
FKG10S-H	10	85	20	FKG10L-H	10	85	20	FKG10S-J	10	72	20
FKG12S-H	12	85	20	FKG12L-H	12	103	20	FKG12S-J	12	85	20
FKG14S-H	14	99	20	FKG14L-H	14	119	20	FKG13S-J	13	98	20
FKG16S-H	16	110	20	FKG16L-H	16	135	20	FKG15S-J	15	104.5	20

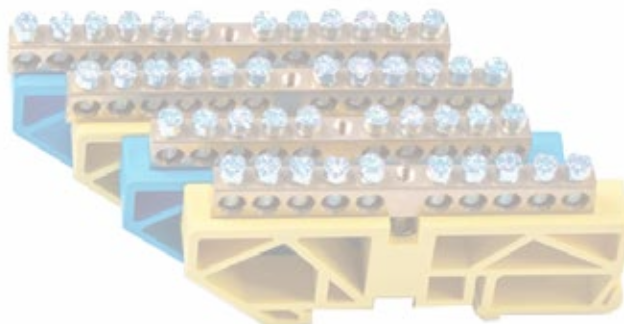


شینه های نول و ارت



شینه نول با روکش پایه پیچی

NS24-FKGL-A
SERIES



شینه ارت با روکش پایه پیچی

NS24-FKGL-A-D
SERIES



شینه نول با روکش ریل خور

NS24-FKGL-C
SERIES

CERTIFICATION	CE/RoHS	CERTIFICATION	CE/RoHS	CERTIFICATION	CE/RoHS						
MATERIAL											
Conductor	Brass	Conductor	Brass	Conductor	Brass						
Screw	M5, Zinc-Coated Steel	Screw	M5, Zinc-Coated Steel	Screw	M5, Zinc-Coated Steel						
Plastic Part	PA66/V-0	Plastic Part	PA66/V-0	Plastic Part	PA66/V-0						
ELECTRICAL DATA											
Voltage(V)	250~400	Voltage(V)	250~400	Voltage(V)	250~400						
Metric Wire(mm ²)	2.5~16	Metric Wire(mm ²)	2.5~16	Metric Wire(mm ²)	2.5~16						
SIZE											
Height/Width(mm)	37x12.5	Height/Width(mm)	37x12.5	Height/Width(mm)	37x13						
Diameter(mm)	7	Diameter(mm)	7	Diameter(mm)	7						
Model	Holes	Length	Pcs/Box	Model	Holes	Length	Pcs/Box	Model	Holes	Length	Pcs/Box
FKG04L-A	4	59.5	20	FKG04L-A/D	4	59.5	20	FKG04L-C	4	57	24
FKG06L-A	6	76.5	20	FKG06L-A/D	6	76.5	20	FKG06L-C	6	57	30
FKG08L-A	8	93.5	20	FKG08L-A/D	8	93.5	20	FKG08L-C	8	78	18
FKG10L-A	10	110.5	20	FKG10L-A/D	10	110.5	20	FKG10L-C	10	89	20
FKG12L-A	12	127.5	20	FKG12L-A/D	12	127.5	20	FKG12L-C	12	102	18

شینه های نول و ارت

