

1 مناسب اتصال هادی Al/Cu از سایز ۲/۵ تا ۵۰ میلیمتر مربع


2 طراحی خلاقانه از جنس آلومینیوم

3 قابلیت اتصال هادی های مس و آلومینیوم بدون نیاز به متصل کننده دو فلزی

4 جنس بدنه از پلی آمید 66

5 قابل نصب روی ریل 35mm

6 آغشته به گریس رسانا جهت جلوگیری از خوردگی الکترو شیمیایی

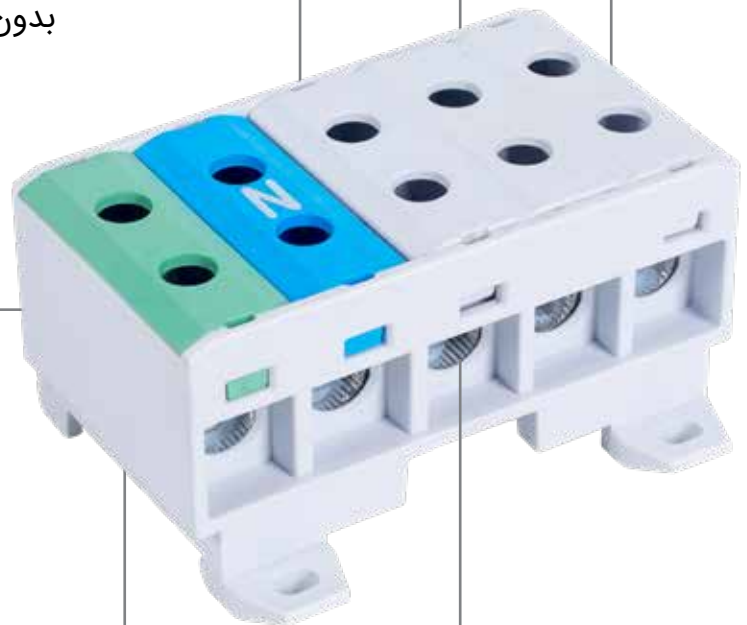

مناسب اتصال هادی Al/Cu از سایز ۱/۵ تا ۱۶ میلیمتر مربع



FJ-E16



FJ-E16/B



FJ-E16/D  
(Without earthing feet)

ITEM	COLOR	MATERIAL			ELECTRICAL DATA			WIRING DATA	
CB/CE/RoHS	Size & Weight	Screw	Housing	Conductor	Standard	Current	Voltage	Torque	Metric Wire
FJ-E16	Gray	Hexagon M4	PA66 V0	Tin-Coated Aluminum	IEC/EN 60947-7-1 IEC/EN 61238-1	Cu 85A Al 85A	1000VAC 1500VDC	1.5Nm(1.5mm <sup>2</sup> ) 3.5Nm(2.5-6mm <sup>2</sup> ) 7Nm(10-16mm <sup>2</sup> )	1 Pole
FJ-E16/B	Blue								Cu 1.5-16mm <sup>2</sup>
FJ-E16/D	Green / Yellow								Al 1.5-16mm <sup>2</sup>
PACKING		Pcs/Inner Box	24PCS		Pcs/Master Carton		816PCS		



FJ-E16/2



FJ-E16/2/B



FJ-E16/2/D  
(Without earthing feet)

ITEM	COLOR	MATERIAL			ELECTRICAL DATA			WIRING DATA	
CB/CE/RoHS	Size & Weight	Screw	Housing	Conductor	Standard	Current	Voltage	Torque	Metric Wire
FJ-E16/2	Gray	Hexagon M4	PA66 V0	Tin-Coated Aluminum	IEC/EN 60947-7-1 IEC/EN 61238-1	Cu 85A Al 85A	1000VAC 1500VDC	1.5Nm(1.5mm <sup>2</sup> ) 3.5Nm(2.5-6mm <sup>2</sup> ) 7Nm(10-16mm <sup>2</sup> )	2 Pole
FJ-E16/2/B	Blue								Cu 1.5-16mm <sup>2</sup>
FJ-E16/2/D	Green / Yellow								Al 1.5-16mm <sup>2</sup>
PACKING		Pcs/Inner Box	14PCS		Pcs/Master Carton		476PCS		

مناسب اتصال هادی Al/Cu از سایز ۲/۵ تا ۳۵ میلیمتر مربع



FJ-E35



FJ-E35/B



FJ-E35/D  
(Without earthing feet)

ITEM	COLOR	MATERIAL			ELECTRICAL DATA			WIRING DATA	
CB/CE/RoHS	Size & Weight	Screw	Housing	Conductor	Standard	Current	Voltage	Torque	Metric Wire
FJ-E35	Gray	Hexagon M4	PA66 V0	Tin-Coated Aluminum	IEC/EN 60947-7-1 IEC/EN 61238-1	Cu 135A Al 120A	1000VAC 1500VDC	3Nm(2.5-16mm <sup>2</sup> ) 6Nm(25-35mm <sup>2</sup> )	1 Pole
FJ-E35/B	Blue								Cu 2.5-35mm <sup>2</sup>
FJ-E35D	Green / Yellow								Al 2.5-35mm <sup>2</sup>
PACKING		Pcs/Inner Box	20PCS		Pcs/Master Carton		660PCS		



FJ-E35/5

ITEM	COLOR	MATERIAL			ELECTRICAL DATA			WIRING DATA		
CB/CE/RoHS	Size & Weight	Screw	Housing	Conductor	Standard	Current	Voltage	Torque	Metric Wire	
FJ-E35x5	Gray/Blue/ Green	80x45.2x40.2mm 117.2g	Hexagon M4	PA66 V0	Tin-Coated Aluminum	IEC/EN 60947-7-1 IEC/EN 61238-1	Cu 135A Al 120A	1000VAC 1500VDC	3Nm(2.5-16mm2) 6Nm(25-35mm2)	5 Pole Cu 2.5-35mm2 Al 2.5-35mm2
PACKING		Pcs/Inner Box	3PCS			Pcs/Master Carton		99PCS		

مناسب اتصال هادی Al/Cu از سایز ۲/۵ تا ۵۰ میلیمتر مربع



FJ-E50/2



FJ-E50/2/B



FJ-E50/2/D  
(Without earthing feet)

ITEM	COLOR	MATERIAL			ELECTRICAL DATA			WIRING DATA		
CB/CE/RoHS	Size & Weight	Screw	Housing	Conductor	Standard	Current	Voltage	Torque	Metric Wire	
FJ-E50/2	Gray	50.3x49.0x43.5mm 96.7	Hexagon M4	PA66 V0	Tin-Coated Aluminum	IEC/EN 60947-7-1 IEC/EN 61238-1	Cu 160A Al 145A	1000VAC 1500VDC	4Nm(2.5-4mm2) 12Nm(6-50mm2)	2 Pole Cu 2.5-50mm2 Al 6-50mm2
FJ-E50/2/B	Blue									
FJ-E50/2/D	Green / Yellow									
PACKING		Pcs/Inner Box	14PCS			Pcs/Master Carton		308PCS		



FJ-E50/3



FJ-E50/3/B



FJ-E50/3/D  
(Without earthing feet)

ITEM	COLOR	MATERIAL			ELECTRICAL DATA			WIRING DATA		
CB/CE/RoHS	Size & Weight	Screw	Housing	Conductor	Standard	Current	Voltage	Torque	Metric Wire	
FJ-E50/3	Gray	42.3X51X43.7mm 84.3g	Hexagon M4	PA66 V0	Tin-Coated Aluminum	IEC/EN 60947-7-1 IEC/EN 61238-1	Cu 160A Al 145A	1000VAC 1500VDC	4Nm(2.5-4mm2) 12Nm(6-50mm2)	3 Pole Cu 2.5-50mm2 Al 6-50mm2
FJ-E50/3/B	Blue									
FJ-E50/3/D	Green / Yellow									
PACKING		Pcs/Inner Box	10PCS			Pcs/Master Carton		220PCS		